


# 9 × 21 NONTOX

## TFMJ

V311702  
124 GRS



After firing the cartridge is free from toxic exposure to barium, lead, mercury, antimony. It does not pollute the environment, does not endanger the shooter's health with combustion products, and does not leave harmful residue in the gun. It ensures safe shooting in closed premises and on target ranges. Unique patented primer design.

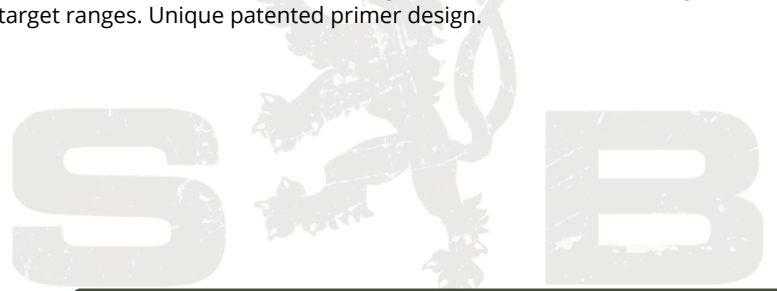

### PROPERTIES

BULLET	TYPE	TFMJ	
	WEIGHT	grs	124
	DIAMETER	in	N/A
	SECTIONAL DENSITY	lb/in <sup>2</sup>	N/A
	MATERIAL OF JACKET	CuZn 30	
BALLISTIC COEFFICIENT		G1	0.152
PRIMER	TYPE	N/A	
	STYLE	N/A	
CARTRIDGE	LENGTH	in	1.171
CASINGS		N/A	
POWER FACTOR ESTIMATED		kgf-fps	147.3
+P AMMUNITION		No	
TEST BARREL LENGTH		in	5
SUGGESTED USE		N/A	
FEATURES		N/A	

### PACKAGING

BOXES PER CASE	20
WEIGHT PER CASE	lb 30

### BALLISTICS

DISTANCE	y	MUZZLE	25	50	100
VELOCITY	fps	1,188	1,125	1,074	994
ENERGY	ft-lb	388	349	317	272
DISTANCE	y	12.5	25	50	100
POINTS OF IMPACT	in	-0.1	0.0	-1.1	-9.6

