


38 SPECIAL NONTOX

TFMJ 158 GRS SB38NT



After firing the cartridge is free from toxic exposure to barium, lead, mercury, antimony. It does not pollute the environment, does not endanger the shooter's health with combustion products, and does not leave harmful residue in the gun. It ensures safe shooting in closed premises and on target ranges. Unique patented primer design.

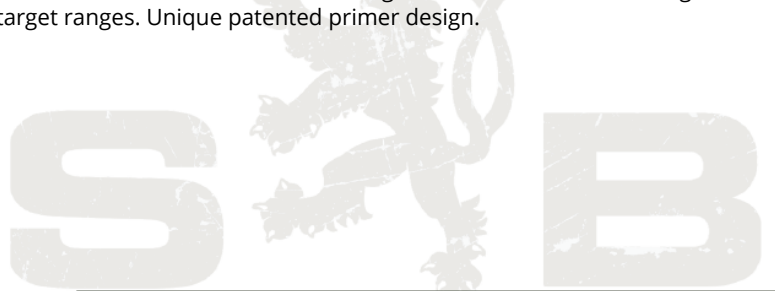

PROPERTIES

BULLET	TYPE		TFMJ
	WEIGHT	grs	158
	DIAMETER	in	0.357
	SECTIONAL DENSITY	lb/in ²	0.177
	MATERIAL OF JACKET		CuZn 30
BALLISTIC COEFFICIENT		G1	0.184
PRIMER	TYPE		Boxer
	STYLE		Large Pistol Primer
CARTRIDGE	LENGTH	in	1.520
CASINGS			Factory Brass
POWER FACTOR ESTIMATED		kgf-fps	137.9
+P AMMUNITION			No
TEST BARREL LENGTH		in	7½
SUGGESTED USE			Range, Match/Competition
FEATURES			Fully Encapsulated Bullet, Reliable Functioning, Non-expanding, No Barrel Leading

PACKAGING

BOXES PER CASE	20
WEIGHT PER CASE	lb 36

BALLISTICS

DISTANCE	y	MUZZLE	25	50	100
VELOCITY	fps	873	855	838	806
ENERGY	ft-lb	267	256	246	228
DISTANCE	y	12.5	25	50	100
POINTS OF IMPACT	in	0.1	0.1	-2.4	-18.9

